

PRO3 COLOR

Channel Letter LED Module

PRO3 Colors 0.72W

- 160 degree angle lens that spreads light evenly for no hot spots
- Specially designed durable cover that withstands harsh environment and protects the LED
- High luminous efficacy guaranteed up to 160 lm/W (PRO3 HE)
- Easy installation with extra size cover of 3M tape and screw hole
- IP68 Waterproof and approved by UL, CE, RoHS
- Best LED solution for Channel Letter and Sign Box illumination
- Advanced performance with guaranteed even brightness
- Long life time 50,000 hours



DESCRIPTION

DURITE PRO is new premium model for LED professionals. PRO is powered by Tier 1 LED with the enhanced lens and wire for highest performance. The extra size cover of 3M tape makes easy installation and saving labor cost. Our ultrasonic welding technology performs for excellent waterproofing and protects LED from harsh environment.

SPECIFICATIONS


Model	PRO3-RESM72	PRO3-GRSM72	PRO3-BLSM72
Colors	Red	Green	Blue
Lumens	33 lm/W	71 lm/W	19 lm/W
Power		0.72 W	
Input Voltage		12V DC	
Forward Current		60 mA	
Beam Angle		160°	
Module Spacing		2 pcs/ft	
Demension		2.76" x 0.67" x 0.4"	
Weight		7.7g	
Max in series		50 Mods	
Operating Temp.		-4°F ~ 140°F / -20°C ~ 60°C	
Life Time		50,000	
IP Rating		IP68 Waterproof	

COVERAGE CHART

Depth	3"	4"	5"	6"~8"
Max Stroke Single Row	8"	10"	12"	14"
Max Stroke Multi Rows	6"	10"	12"	14"
Mods per ft		2 pcs per ft		
Standard Run		50 pcs		
Max Run		50 pcs		

Parameters can be adjusted according to the desired brightness.

DIMENSION

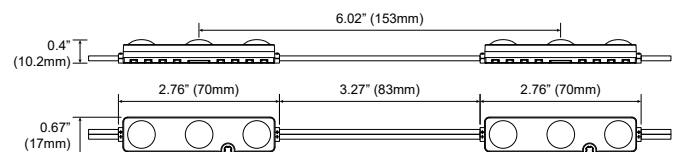

PRO3 COLOR

Channel Letter LED Module

PRO3 Pink 0.72W

- 160 degree angle lens that spreads light evenly for no hot spots
- Specially designed durable cover that withstands harsh environment and protects the LED
- High luminous efficacy guaranteed up to 160 lm/W (PRO3 HE)
- Easy installation with extra size cover of 3M tape and screw hole
- IP68 Waterproof and approved by UL, CE, RoHS
- Best LED solution for Channel Letter and Sign Box illumination
- Advanced performance with guaranteed even brightness
- Long life time 50,000 hours



DESCRIPTION

DURiTE PRO is new premium model for LED professionals. PRO is powered by Tier 1 LED with the enhanced lens and wire for highest performance. The extra size cover of 3M tape makes easy installation and saving labor cost. Our ultrasonic welding technology performs for excellent waterproofing and protects LED from harsh environment.

SPECIFICATIONS


Model	PRO3-PKHS72
Colors	Pink
Lumens	83 lm/W
Power	0.72 W
Input Voltage	12V DC
Forward Current	60 mA
Beam Angle	160°
Module Spacing	2 pcs/ft
Demension	2.76" x 0.67" x 0.4"
Weight	7.7g
Max in series	50 Mods
Operating Temp.	-4°F ~ 140°F / -20°C ~ 60°C
Life Time	50,000
IP Rating	IP68 Waterproof

COVERAGE CHART

Depth	3"	4"	5"	6"~8"
Max Stroke Single Row	8"	10"	12"	14"
Max Stroke Multi Rows	6"	10"	12"	14"
Mods per ft	2 pcs per ft			
Standard Run	50 pcs			
Max Run	50 pcs			

Parameters can be adjusted according to the desired brightness.

DIMENSION

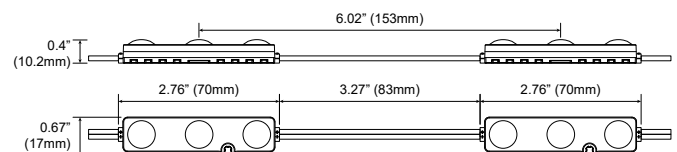

PRO3 COLOR

Channel Letter LED Module



PRO3 Yellow 0.72W

- 160 degree angle lens that spreads light evenly for no hot spots
- Specially designed durable cover that withstands harsh environment and protects the LED
- High luminous efficacy guaranteed up to 160 lm/W (PRO3 HE)
- Easy installation with extra size cover of 3M tape and screw hole
- IP68 Waterproof and approved by UL, CE, RoHS
- Best LED solution for Channel Letter and Sign Box illumination
- Advanced performance with guaranteed even brightness
- Long life time 50,000 hours



DESCRIPTION

DURITE PRO is new premium model for LED professionals. PRO is powered by Tier 1 LED with the enhanced lens and wire for highest performance. The extra size cover of 3M tape makes easy installation and saving labor cost. Our ultrasonic welding technology performs for excellent waterproofing and protects LED from harsh environment.

SPECIFICATIONS

Model	PRO3-YLYG72
Colors	Yellow
Lumens	80 lm/W
Power	0.72 W
Input Voltage	12V DC
Forward Current	60 mA
Beam Angle	160°
Module Spacing	2 pcs/ft
Demension	2.76" x 0.67" x 0.4"
Weight	7.7g
Max in series	50 Mods
Operating Temp.	-4°F ~ 140°F / -20°C ~ 60°C
Life Time	50,000
IP Rating	IP68 Waterproof

COVERAGE CHART

Depth	3"	4"	5"	6"~8"
Max Stroke Single Row	8"	10"	12"	14"
Max Stroke Multi Rows	6"	10"	12"	14"
Mods per ft	2 pcs per ft			
Standard Run	50 pcs			
Max Run	50 pcs			

Parameters can be adjusted according to the desired brightness.

DIMENSION

